

Hood

Fume Hood

퓨뮴후드



Features

- Upper and lower separable and designed for the height of workers waist.
- Water supply available by adjust valve.
- 110V, 220V socket available for the convenience to use outside device.
- Various utility valve.
- Tempered glass for the protection of tester.


Specifications

Made in Korea

Spec. / Model		FH-120	FH-150	FH-180
Material	External	Steel, Powder coating		
	Internal	Stainless steel #304		
	Work top	Ceramide board		
	Windows	Safety glass 5t		
Work area(WxD, mm)		1030x650	1330x650	1630x650
Dimension(WxDxH,mm)		1200x800x2300	1500x800x2300	1800x800x2300
Face Velocity		0.25~0.5 m/sec		
Illuminator		Semi Vapor proof		
Utility Device		Air, N2, Water cock & 110/220V receptacle		
Electric Requirements		220VAC 50/60Hz		
Weight (kg)		270	320	370


Fume Hood

Distinction

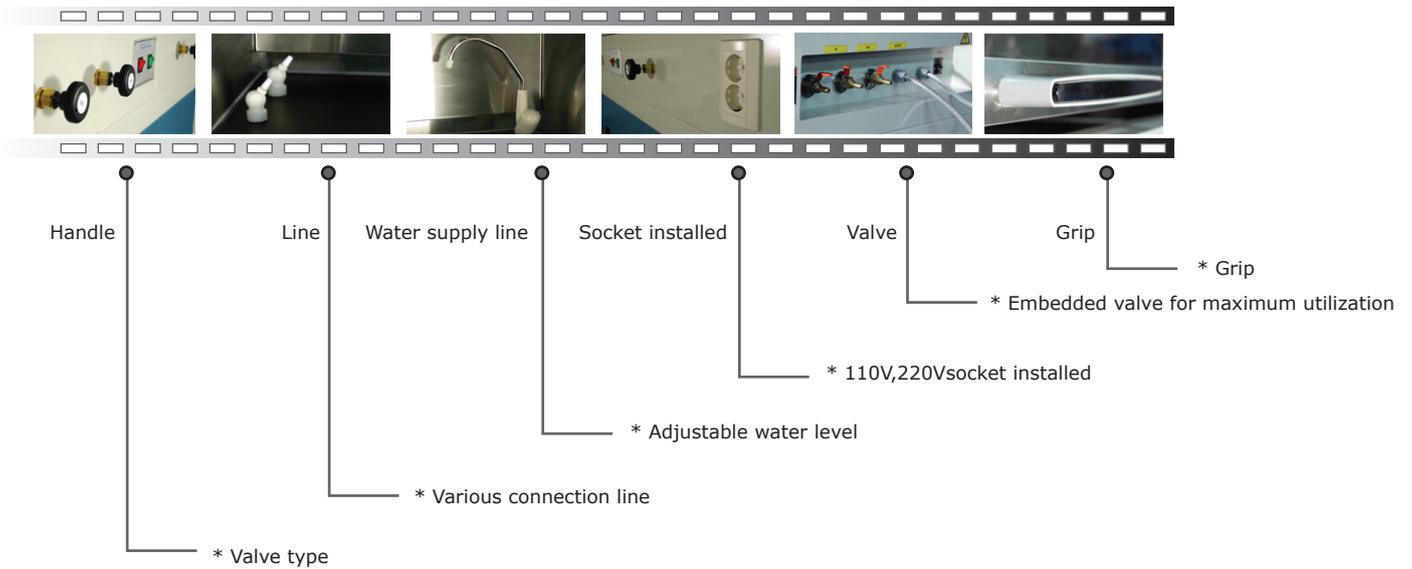


Registered ISO 9001:2008

Structure

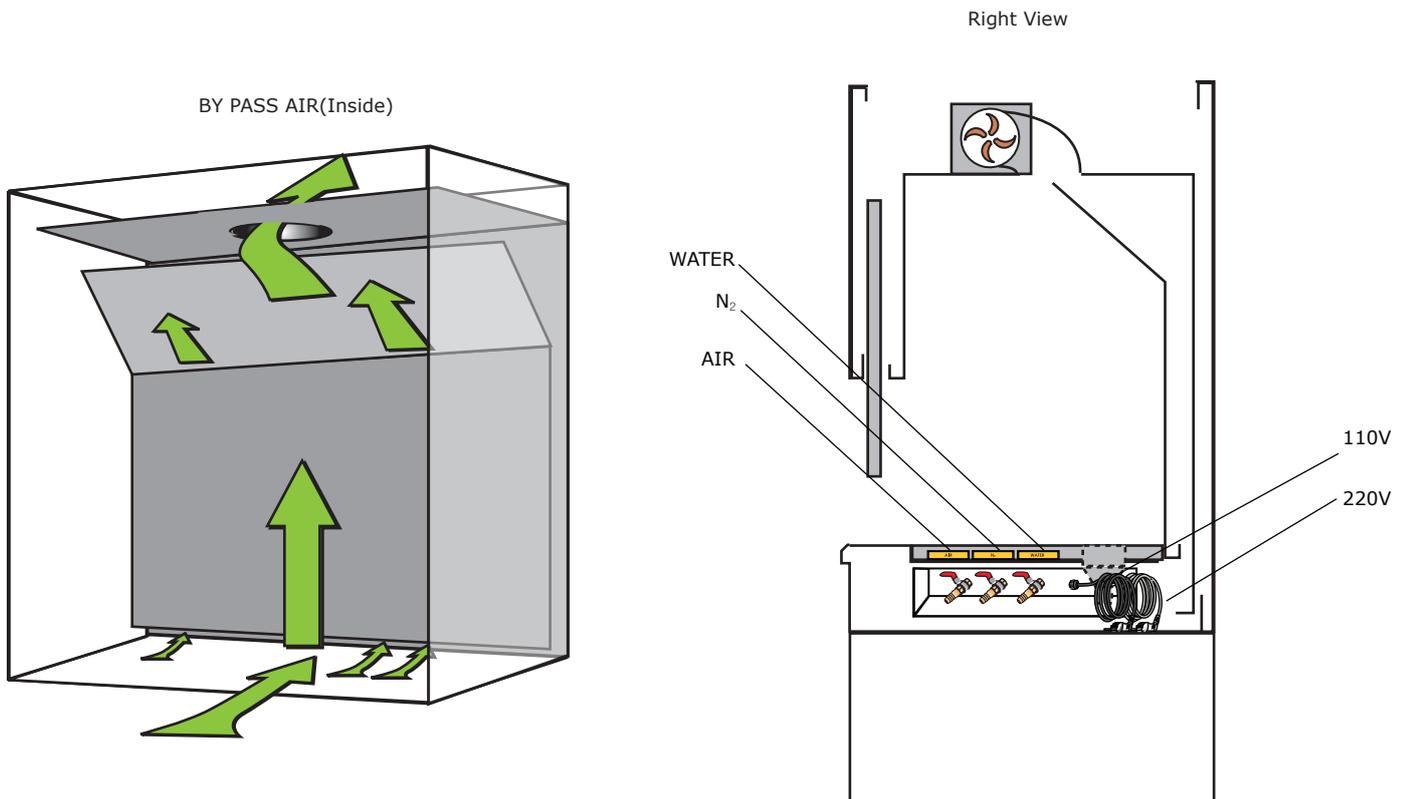

Fume Hood

● Description of the parts

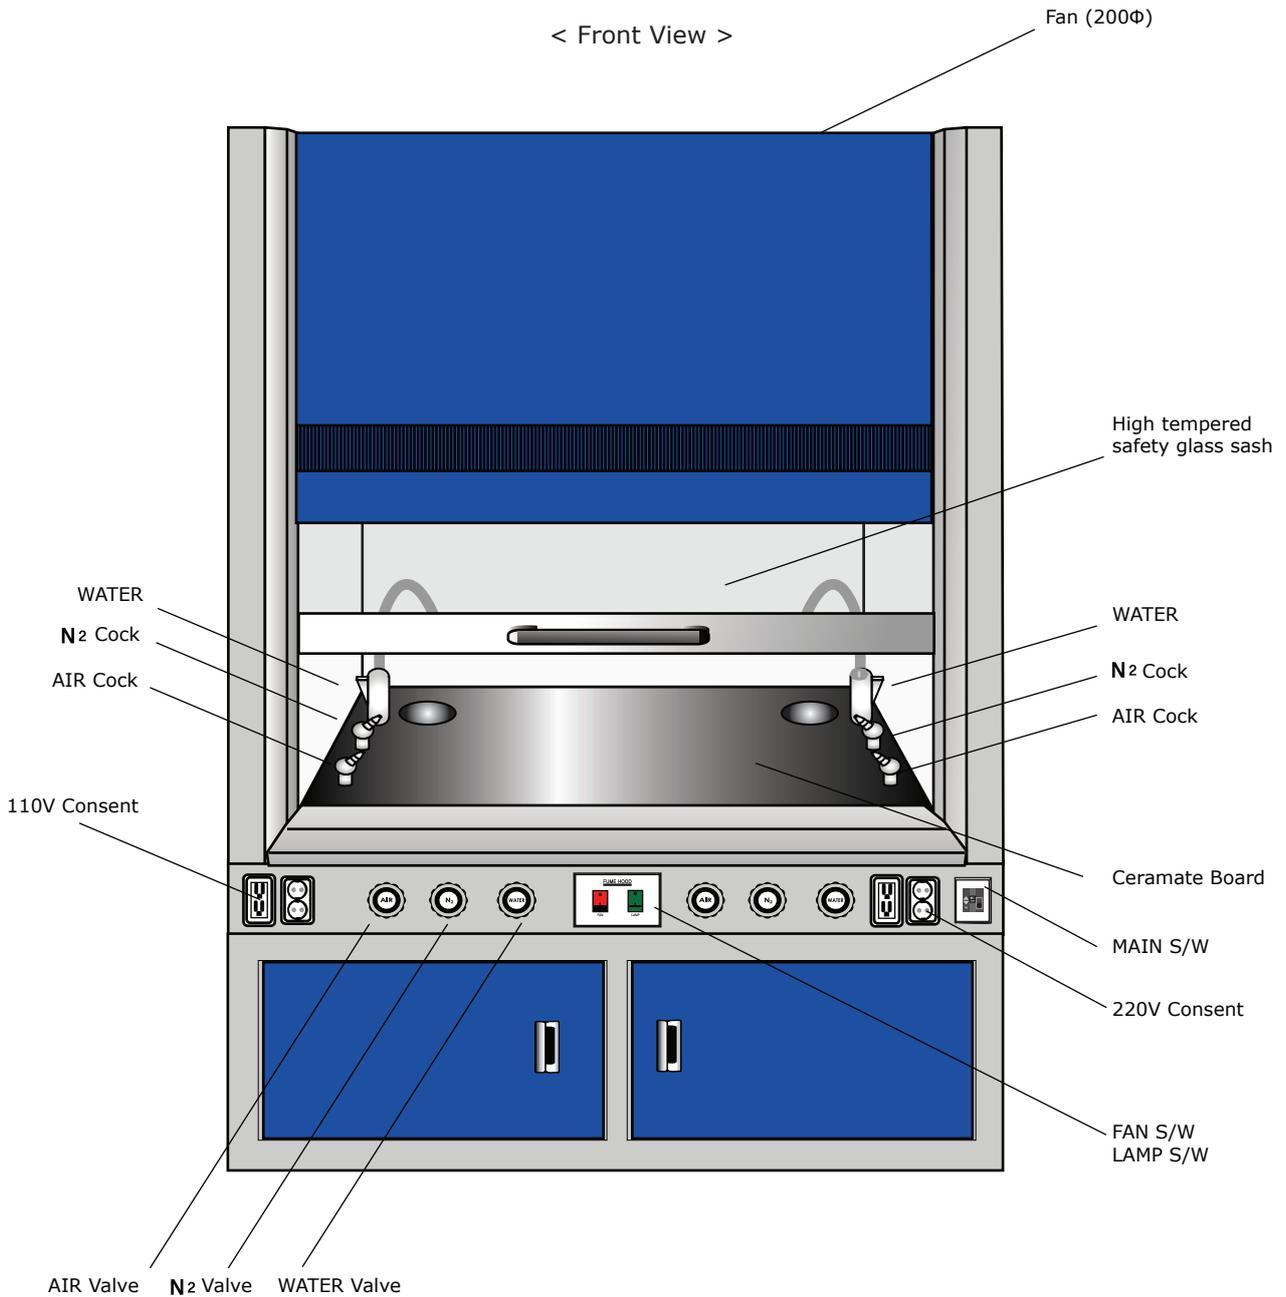

Out size : 1800 x 800 x 2300 (W x D X H,mm)

Model: FH-180